


OP6010A - Press Porcelain Furnace

The most convenient ingot system in the world

Efficient, Convenient, Fast, Low cost | Compatible with all casting porcelain blocks Built in numbers of programme and can be used as a ceramic furnace.

Servo motor driven die casting,
constant pressure, no external air source,
high success rate.

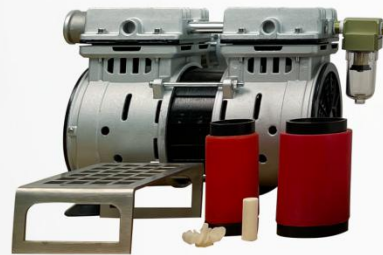

OPERATION

The velocity of temperature increasing : 200°C /min max.

The max temperature : 1200°C max(2283°F)

Vacuum level : 1-101%

The time which can be kept at the max temperature : 2H

ELECTRIC POWER

Operation range: 100-120V 50/60Hz 230V 50/60Hz	Power max: 1500w
--	------------------

Electric current : 14.5ampere@110V 7.0ampere@230V
